


DHN-60X16/DG(BB) 475~485W

High Efficiency Double Glass PV Module

Comprehensive Products & System Certificates

IEC 61215 / IEC 61730 / CE / INMETRO
ISO 45001
2018/International standards for occupational health & safety
ISO 14001
2015/Standards for environmental management system
ISO 9001
2015/Quality management system

 25 Material & technology warranty

 30 Linear power output warranty



TOPCon cells double-sided rate up to 85% and more back power generation by 5-25%



Double-glass Technology, higher encapsulation blocking and mechanical strength



Higher performance in anti hidden cracking, acid and alkali, salt spray, water vapor, UV, PID



TOPCon cells, lower attenuation, better temperature coefficient & dim light performance




LECO laser assisted sintering technology, reduces contact resistance and improves efficiency by 0.2% -0.5%




DHN-60X16/DG(BB) 475~485W

Design

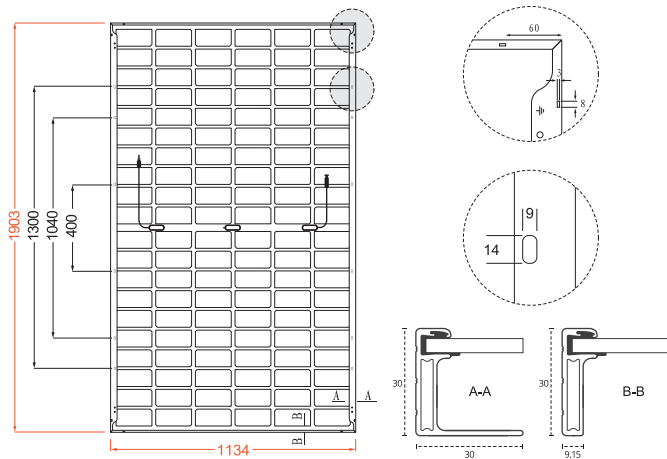

30-Year Linear Power Output Warranty

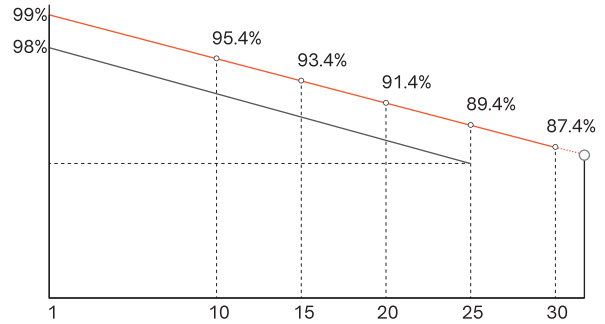

- DAH Solar linear power output guarantee
- Standard linear power output guarantee

Mechanical Specification

No. of Cells	120 (6×20)
Weight	26kg
Cells Type	N-type 182×91mm
Dimension (L×W×T)	1903×1134×30mm
Packing	36pcs/Pallet, 864pcs/40HQ

Cable	4.0mm ² , 300/200mm in length, (Including connector) length can be customized
Glass	2.0mm High Transmission, Antireflection Coating
Junction Box	IP68, 3 Bypass Diodes
Connector	MC4 Compatible

Electrical Characteristics

Module Type	DHN-60X16/DG(BB)							
	STC		NOCT		STC		NOCT	
Test conditions	STC	NOCT	STC	NOCT	STC	NOCT	STC	NOCT
Maximum Power (P _{max} /W)	475	357	480	361	485	365	485	365
Open-circuit Voltage (V _{oc} /V)	42.6	40.47	42.8	40.66	43.0	40.85	43.0	40.85
Maximum Power Voltage (V _{mp} /V)	36.2	34.39	36.4	34.58	36.6	34.77	36.6	34.77
Short-circuit Current (I _{sc} /A)	13.96	11.27	14.02	11.32	14.08	11.37	14.08	11.37
Maximum Power Current (I _{mp} /A)	13.12	10.39	13.19	10.44	13.25	10.49	13.25	10.49
Module Efficiency (STC)	22.01%		22.24%		22.47%		22.47%	
Refer Bifacial Factor	80±5%							

STC-Standard Test Environment: Irradiance 1000W/m², Cell temperature 25°C, Spectrum AM1.5

NOCT-Standard Test Environment: Irradiance 800W/m², Ambient temperature 20°C, Spectrum AM1.5, Wind speed 1m/s

Double-Sided Power Generation Parameters (Rear gain)

5%	Maximum Power (P _{max})	499	504	509
	Module Efficiency (%)	23.11	23.35	23.60
15%	Maximum Power (P _{max})	546	552	558
	Module Efficiency (%)	25.31	25.58	25.85
25%	Maximum Power (P _{max})	594	600	606
	Module Efficiency (%)	27.51	27.80	28.09

Operating Parameters

Maximum System Voltage	1500V DC
Operating Temperature	-40 ~ +85°C
Maximum Series Fuse Rating	30A
Nominal Operating Cell Temperature	45°C±2°C
Application Level	Class A

Temperature Coefficient

Temperature Coefficient of I _{sc} (ΔI _{sc})	0.046%/°C
Temperature Coefficient of V _{oc} (βV _{oc})	-0.25%/°C
Temperature Coefficient of P _{max} (γP _{mp})	-0.29%/°C
Snow load, frontside / Wind load, backside	5400Pa/2400Pa